



US00D813651S

(12) **United States Design Patent**  
**Votel et al.**

(10) **Patent No.:** **US D813,651 S**  
(45) **Date of Patent:** **\*\* Mar. 27, 2018**

- (54) **LANYARD WITH CARABINER**
- (71) Applicant: **Tenacious Holdings, Inc.**, St. Paul, MN (US)
- (72) Inventors: **Thomas Votel**, Sunfish Lake, MN (US);  
**Nathan Bohmbach**, Lakeville, MN (US)
- (73) Assignee: **Tenacious Holdings, Inc.**, St. Paul, MN (US)

6,990,928	B2	1/2006	Kurtgis	
7,062,857	B1	6/2006	Nenadic	
D528,406	S *	9/2006	Kramer	D8/356
7,762,860	B2	7/2010	Reed	
7,857,099	B2	12/2010	Choate	
D686,488	S *	7/2013	Abels	D8/356
D687,699	S *	8/2013	Hollis	D8/349
8,522,997	B2	9/2013	Lane et al.	
D693,207	S *	11/2013	Petzl	D8/356
8,584,797	B2	11/2013	Krauss	
8,595,862	B2	12/2013	Storms, Jr. et al.	

(Continued)

(\*\*) Term: **15 Years**

*Primary Examiner* — John Windmuller

*Assistant Examiner* — Benjamin Weeks

(21) Appl. No.: **29/569,718**

(74) *Attorney, Agent, or Firm* — Skaar Ulbrich Macari, P.A.

(22) Filed: **Jun. 29, 2016**

(57) **CLAIM**

(51) **LOC (11) Cl.** ..... **09-06**

The ornamental design for a lanyard with carabiner, as shown and described.

(52) **U.S. Cl.** ..... **D8/356**

(58) **Field of Classification Search**  
USPC .... D6/323; D8/67, 330, 349, 354, 355, 356,  
D8/363, 364, 367, 371, 373, 383, 397;  
D15/5, 146, 147, 148; D34/32, 33, 35  
See application file for complete search history.

**DESCRIPTION**

(56) **References Cited**

U.S. PATENT DOCUMENTS


D275,266	S *	8/1984	Kawahara	D8/382
5,316,102	A	5/1994	Bell	
5,360,082	A	11/1994	Bell	
5,361,866	A	11/1994	Bell et al.	
5,375,678	A	12/1994	Bell	
5,878,833	A	3/1999	Bell	
6,099,437	A	8/2000	Demers	
6,125,966	A	10/2000	Jones	
6,299,040	B1	10/2001	Matias	
6,478,112	B2	11/2002	Lee	
6,698,544	B2	3/2004	Kurtgis	
6,776,317	B1	8/2004	Parker	
6,883,640	B2	4/2005	Kurtgis	

FIG. 1 is a left side elevation view of a lanyard with carabiner showing our new design;  
FIG. 2 is a right side elevation view thereof;  
FIG. 3 is a left side elevation view thereof, showing the carabiner open;  
FIG. 4 is a right side elevation view thereof, showing the carabiner open;  
FIG. 5 is a back elevation view thereof;  
FIG. 6 is a front elevation view thereof;  
FIG. 7 is a top plan view thereof; and,  
FIG. 8 is a bottom plan view thereof.

The broken lines represent the portions of the design that form no part of the claim.

The lanyard with carabiner is shown broken away in the middle to indicate that it has no specific length other than what is shown.

**1 Claim, 4 Drawing Sheets**



(56)

**References Cited**

## U.S. PATENT DOCUMENTS

8,714,305	B2	5/2014	Fontaine	
8,757,455	B2	6/2014	Smalley	
8,826,462	B2	9/2014	Storms, Jr. et al.	
8,869,934	B2	10/2014	Bodnar et al.	
8,887,866	B2	11/2014	Petty et al.	
8,898,814	B2	12/2014	Storms, Jr. et al.	
D723,903	S *	3/2015	Kelleghan .....	D8/356
8,997,928	B1	4/2015	Ellis	
9,149,670	B1	10/2015	Walker et al.	
9,155,376	B2	10/2015	Moreau et al.	
D745,375	S *	12/2015	Gobbi .....	D8/356
9,232,849	B2	1/2016	Moreau et al.	
9,232,850	B2	1/2016	Moreau et al.	
9,339,100	B2	5/2016	Moreau et al.	
9,402,457	B2	8/2016	Moreau et al.	
D765,497	S *	9/2016	Petzl .....	D8/356
9,451,819	B2	9/2016	Mathews, Jr.	
D769,104	S *	10/2016	Reid .....	D8/356
9,480,327	B2	11/2016	Moreau et al.	
9,492,693	B2	11/2016	Byrd	

\* cited by examiner

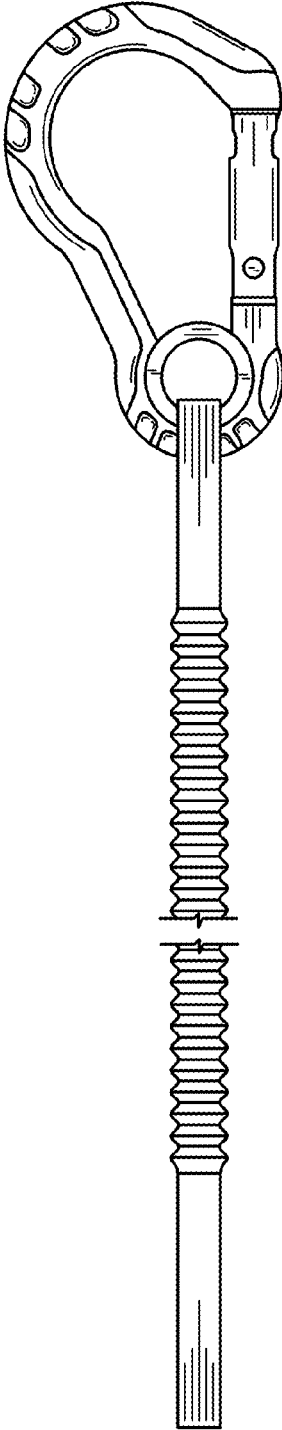


FIG. 1

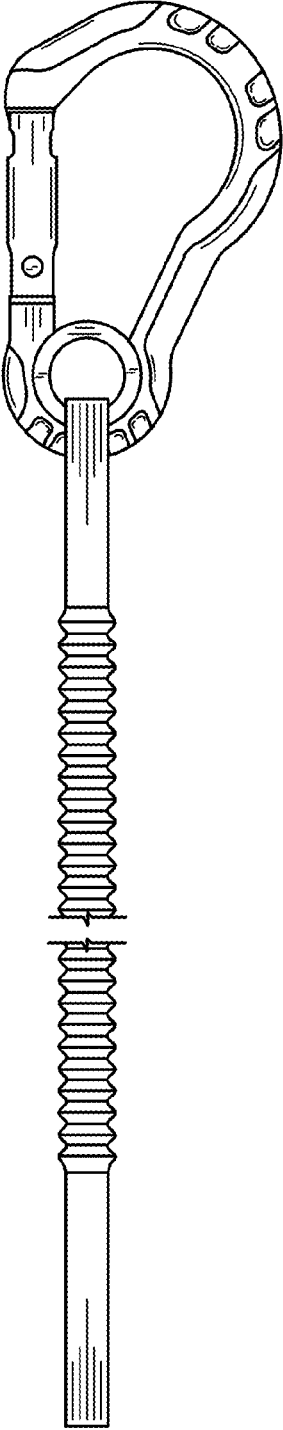


FIG. 2

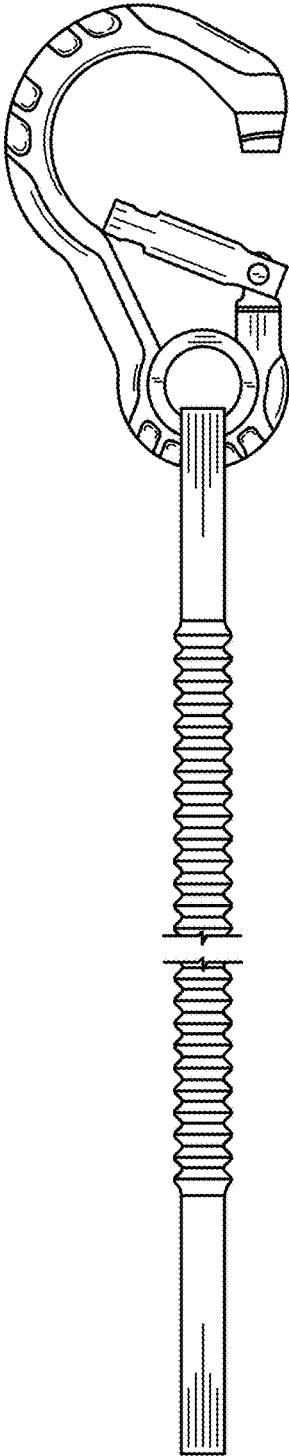


FIG. 3

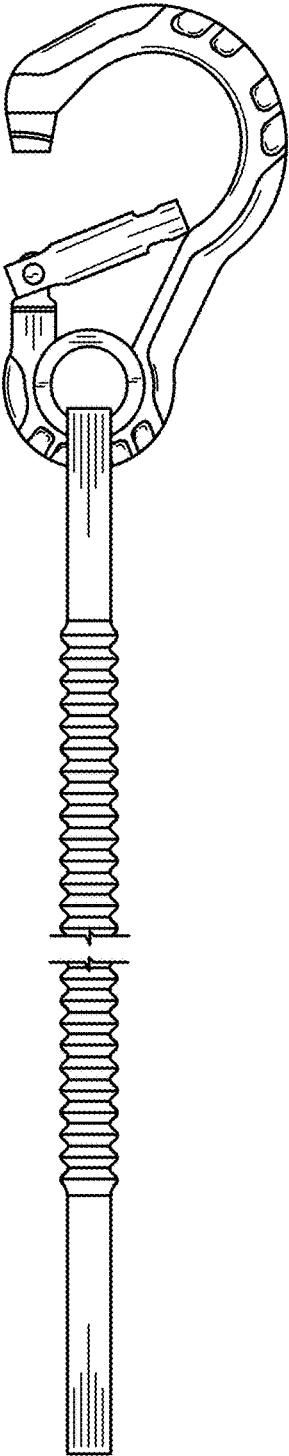


FIG. 4




FIG. 5




FIG. 6



FIG. 7



FIG. 8